


Mud Pumps

MP-T-1300-AC

MP-T-1600-AC

MP-T-2200-AC

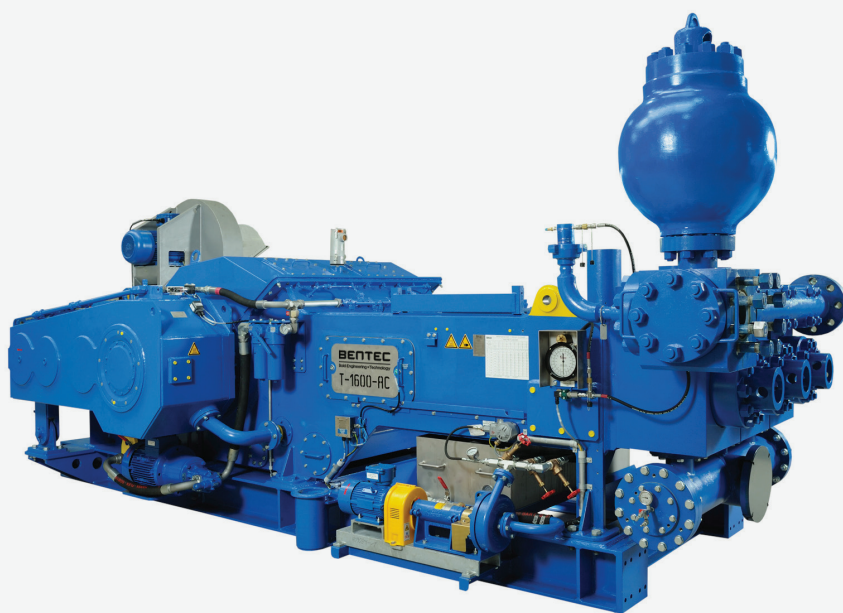

Specifications

Power range	1,300 to 2,200 hp
Maximum pressure	7,500 psi
Maximum flow rate	Up to 4,815 l/min
Maximum stroke rate	Up to 120 SPM
Drive options	AC or DC
Fluid ends	5,000 psi or 7,500 psi
Power supply	Electric drive
Compliance	API 7K components CE
Optional certifications	ATEX DNV API Monogram

Key features

- From 1300 to 2200hp
- Direct-driven external gearbox
- In-house AC motor technology
- Patented liner retention system
- Smart Fluid Ends
- P-Quip rod and valve systems
- 5,000 psi & 7,500 psi fluid ends
- Compact <3 m footprint
- optiPUMP™ upgradeable

Benefits

The BENTEC Mud Pump is engineered to maximize reliability while reducing maintenance and operating costs.

Its direct-driven external gearbox eliminates chains, belts and internal gears, reducing wear and simplifying servicing.

Patented liner retention and quick-service systems improve maintenance safety and minimize downtime, while Smart Fluid Ends and upgradeable configurations provide long-term flexibility.

Designed for demanding drilling environments, every pump delivers dependable precision and performance, lower total cost of ownership and the uptime drilling operations depend on.